


Name: _____
Date: _____
Track: _____


Track Conditions

Size: ☐ Open ☐ Med. ☐ Tight
Traction: ☐ High ☐ Med. ☐ Low
Surface: ☐ Smooth ☐ Med. ☐ Bumpy

Front suspension

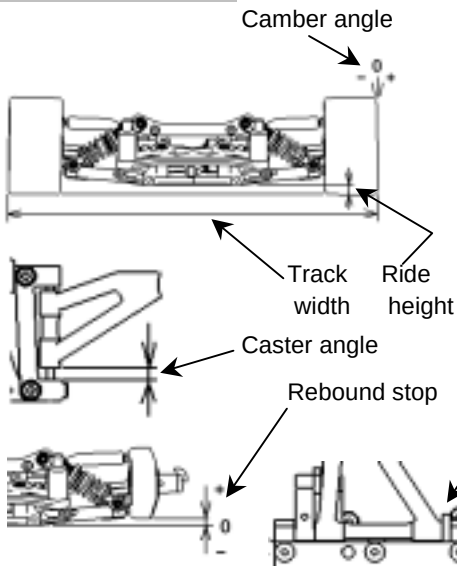


Track width 252 mm
Ride height 5 mm
Camber angle -1.5 °
Caster angle 2 mm
Toe angle out 1 °
Rebound stop 0 mm
Bump stop ☒ None ☐ Use
Lower arm spacer 3 mm
Upper arm position 0 mm
Anti-roll bar




Front shock


Piston Stock
Oil # 600
Springs White
Shock position




Steering ackerman



Rear suspension

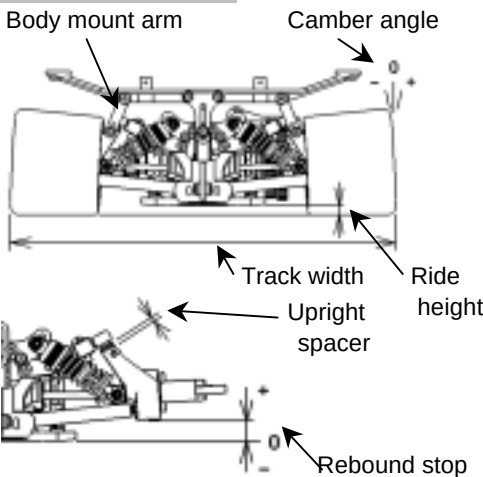


Track width 263 mm
Ride height 6 mm
Camber angle -3 °
Toe angle in 1.5 °
Rebound stop 9 mm
Bump stop ☒ None ☐ Use
Lower arm position(H0134) ☐ 4.5mm ☒ 5.5mm ☐ 6.5mm
Upright spacer 2 mm
Anti-roll bar ☒ Wire ☐ Adjustable
3 mm
3 mm



Rear shock

Piston Stock
Oil # 600
Springs White
Shock position



Body mount arm ☒ Long(H0466C) ☐ Short(H0466D)

Engine

Type _____
Gasket _____ mm Muffler _____
Plug _____ Fuel _____

Clutch

Clutch shoe ☐ Black ☒ Gray ☐ Red
Centrifugal shoe Light weight
Spring Super hard
Clutch bell clearance 0.4 mm
Spring adj. nut position 0.8 mm

Tire

<Front>

Type _____
Dia.(start) L 69 /R 69
Dia.(finish) L /R

<Rear>

Type _____
Dia.(start) L 76 /R 76
Dia.(finish) L /R

Brake pad

☐ Black ☒ Yellow

Body

Type PROTOform LOLA T530
Body position 10 mm
Rear spoiler 5 mm



Drive ratio

Gear ratio Side pulley
1st. 17/49 ☐ 25T
2nd. 20/46 ☒ 26T

Result

Race time / Lap _____
Best lap (1Lap) _____

Comments:

