



Name : _____
Date : _____
Track : _____

Track Conditions	Size:	☐ Open	☐ Med.	☐ Tight
	Traction:	☐ High	☐ Med.	☐ Low
	Surface:	☐ Smooth	☐ Med.	☐ Bumpy


Front suspension

Camber angle -2 °
 Upper arm position 2 mm
 Toe angle 0 °
 Rebound sto 32 mm
 Bump stop
☐ None ☒ Use
 Anti-roll bar
☐ None ☒ Use φ2.1 mm





Shocks

Piston Stock
 Oil # 350
 Spring Stock
 Spacer 3 mm

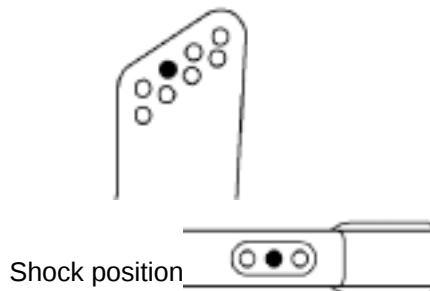


Rear suspension

Camber angle -3 °
 Toe angle **A** 2.5 mm
 B 2.5 mm
 Rebound sto 25 mm
 Bump stop
☐ None ☒ Use
 Anti-roll bar
☐ None ☒ Use φ2.6 mm

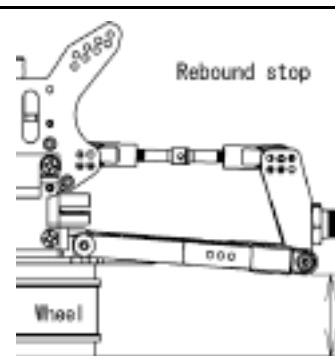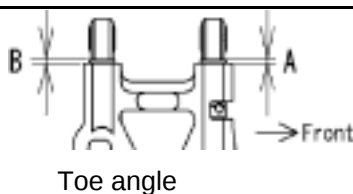

Shock

Piston Stock
 Oil # 350
 Spring Stock
 Spacer 5 mm

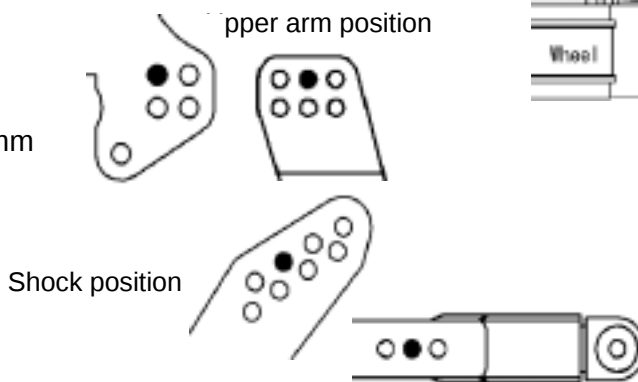

Engine	Type	_____
	Gasket	_____ mm
	Plug	_____

Diff. Oil	Front	#	<u>3,000</u>
	Center	#	<u>7,000</u>
	Rear	#	<u>1,000</u>

Tires	Front	Rear
	Type _____	Type _____
	Insert _____	Insert _____

Clutch	Clutch shoes	☒ Black ☐ White
	Spring	<u>Stock</u> mm
	Clutch bell	<u>14</u> T

Result

Race time / Lap _____
 Best lap (1Lap) _____

Comments :

.....

